


STANDARD GOLF® ***COMPANY***

OWNER'S MANUAL FOR THE E-ZEE WHITE™ PAINT TOOL


PATENT PENDING

1. **Be sure cup is set at a depth of 1 inch (2.5 cm).
See figure 1.**

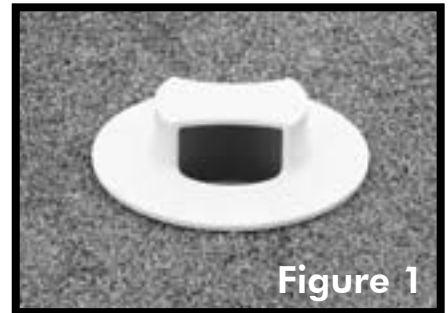


2. **Insert rubber gasket into tool. Use a small amount of gasket adhesive on one side of the gasket and adhere it to tool. This will help prevent loss of gasket.**

3. **Place E-Zee White applicator on top of cup. Use provided O-ring only if applicator will not sit properly on cup. See figure 2.**

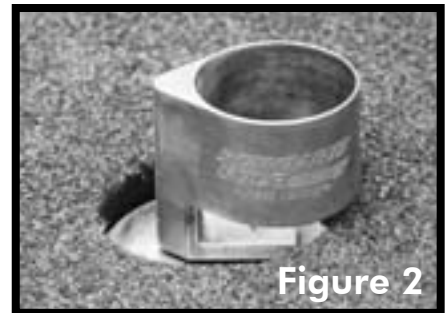

4. **Shake up an E-Zee White paint can and place upside down in applicator. Make sure nozzle is pointing outward. See figure 3.**

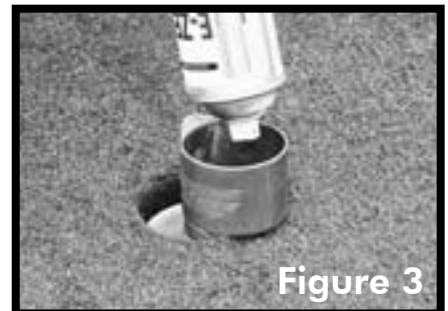

5. **Placing hand on top of E-Zee White paint can, press down and turn with your wrist. Rotate can until desired coverage is obtained. See figure 4.**



6. **Remove applicator from hole by slightly tilting while lifting.**

7. **Wipe off excess paint if necessary. Following final application, clean with water and abrasive pad.**

PART NUMBER 55600